



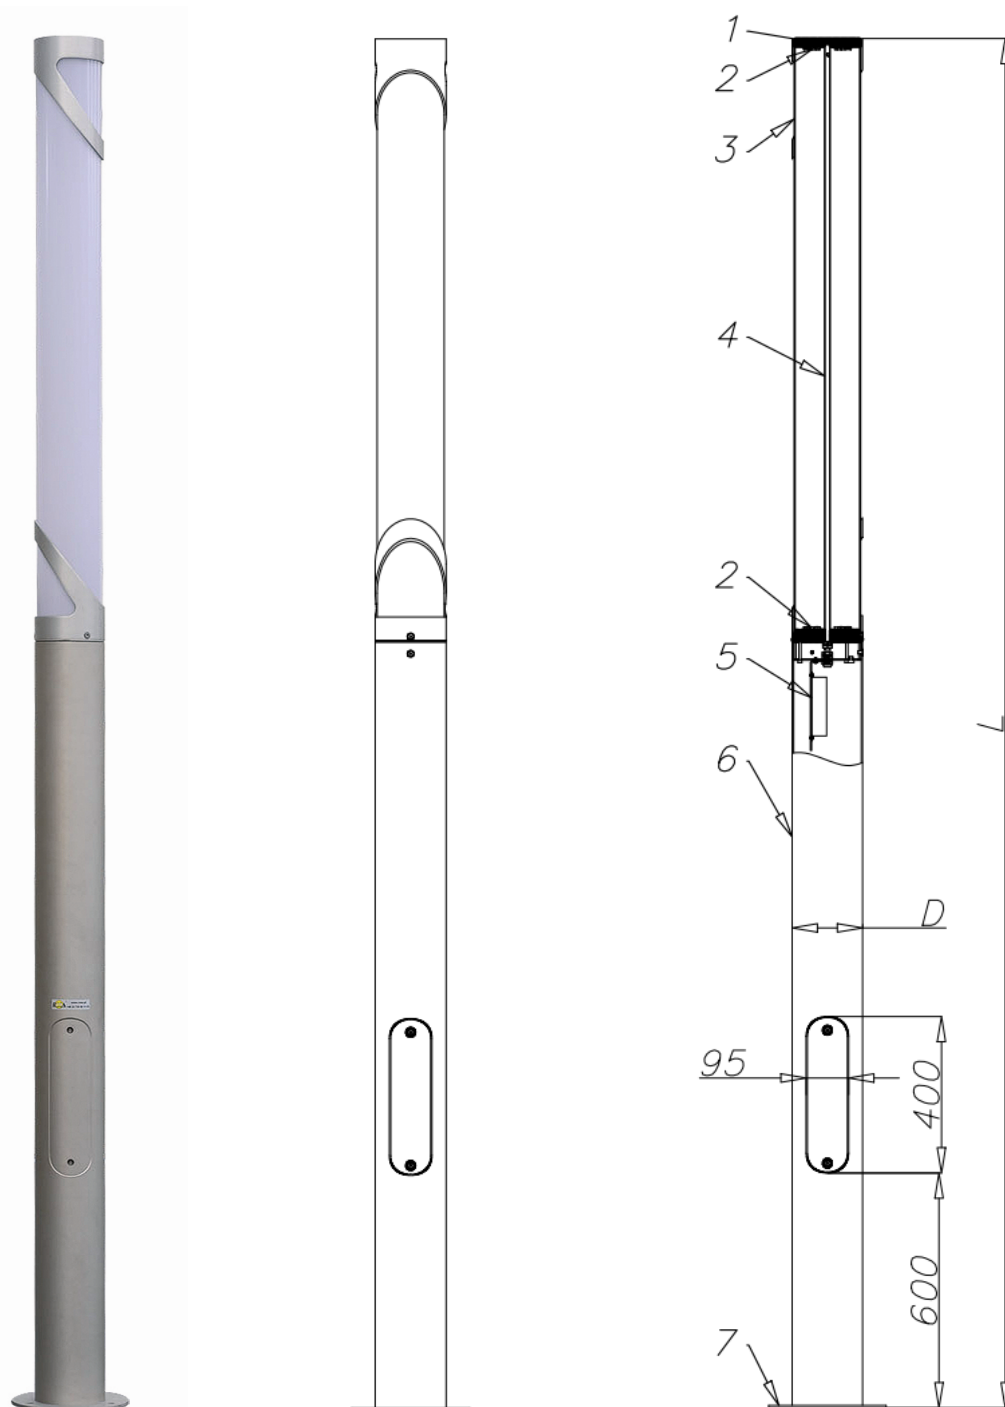

1. Cover
2. LED module
3. Lamp-diffuser
4. Frame
5. Driver
6. Aluminium tubular body
7. Base plate

Distribution curve SAL DECO-3 LED

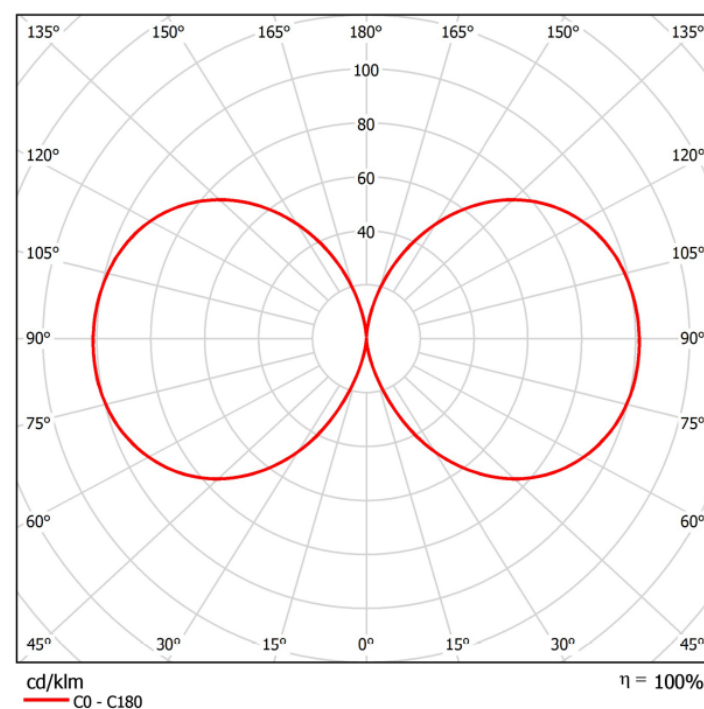

- surface: polished aluminium
- anodizing in 12 colours
- option of powder painting in RAL colours (other colours available on request)
- elastomer protection option in the color of the column to a height of 350 mm (other height on request)
- ROSA standard wiring chamber
- packing: sleeve material / bubble foil

Technical data

Column	SAL DECO-3 LED
Code	42923
Insulation class	IP65
Protection degree	II
Light source	diodes CREE XT-E
Colour temperature [K]	5000
LEDs power [W]	48
LEDs amount	24
Voltage [V]	220-240 AC
Frequency [Hz]	50/60
Luminous efficiency [lm/W]	44
Total power [W]	56
Luminous flux [lm]	2500
Supply current [A]	0,7
Height—L [mm]	3500
Diameter at the base plate [mm]	180
Construction	lamp diffuser made of UV resistant polycarbonate; aluminium decorative elements
Net weight [kg]	28
Unit volume [m ³]	0,12
Concrete footing/reinforcement basket	B-31 / Z-31
Concrete footing code/reinforcement basket code	311131 / 311231
Hot galvanized nut set	311004

* due to the precision class of diodes tolerance is +/- 3%

- Low Voltage Directive LVD 2006/95/WE, norm PN-EN 60598-1
- Directive EMC 2004/108/WE, norms: PN-EN 55015, PN-EN 61547, PN-EN 61000-3-2, PN-EN 61000-3-3