


SAL DECO-1 LED

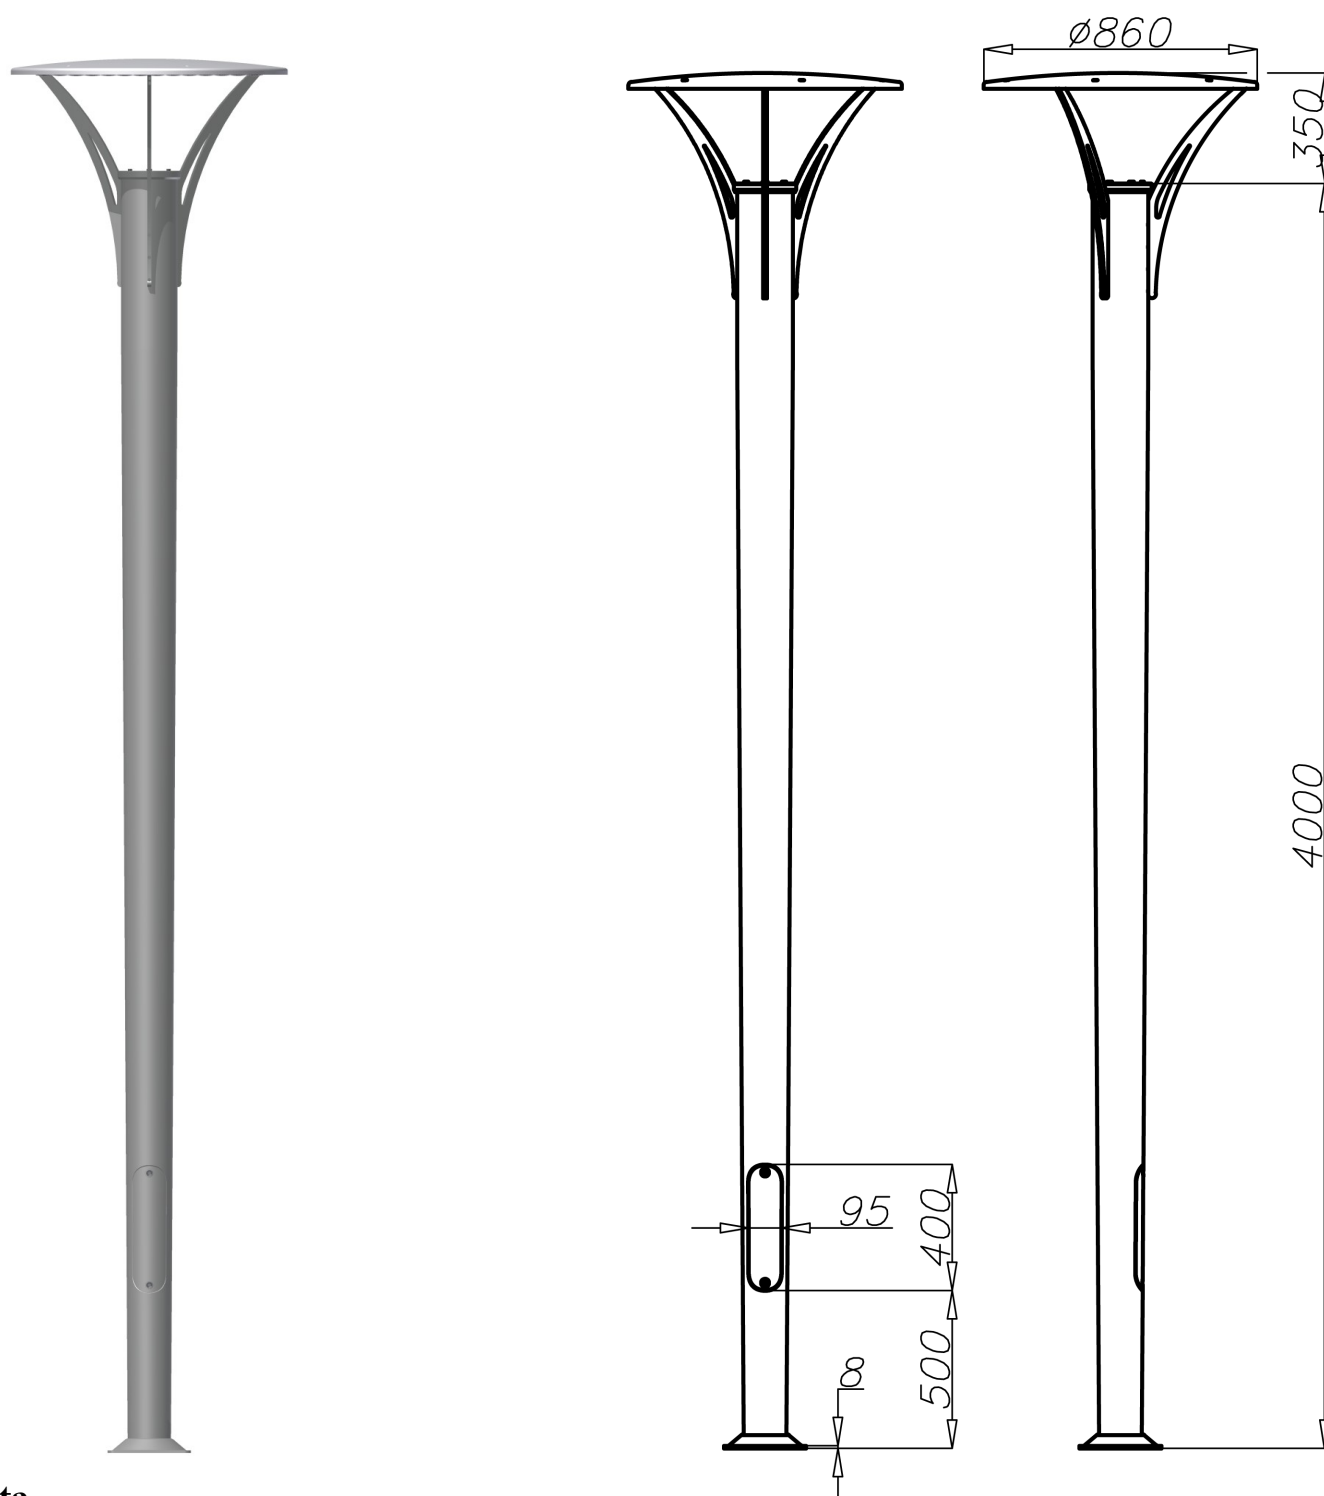

Technical data

Column	SAL DECO-1 LED
Code	42928
Insulation class	II
Protection degree	IP65
Light source	diodes CREE MC-E NW
Colour temperature [K]	4000-4500
LEDs power [W]	106
LEDs amount	12
Voltage [V]	220-240 AC
Frequency [Hz]	50/60
Total power [W]	118
Luminous flux [lm]	7200
Supply current [A]	0,7
Height [mm]	4350
Diameter at the base plate [mm]	132
Construction	electrical equipment built on top of heat-closed with resistant glass; cap with an external louvre in the form of convex mirror squares; 3 connecting arms with a circular roof
Net weight [kg]	43,5
Unit volume [m ³]	0,35
Concrete footing/reinforcement basket	B-51A / Z-51A
Concrete footing code/reinforcement basket code	311151A / 311251A
Hot galvanized nut set	4008

- Low Voltage Directive LVD 2006/95/WE, norm PN-EN 60598-1
- Directive EMC 2004/108/WE, norms: PN-EN 55015, PN-EN 61547, PN-EN 61000-3-2, PN-EN 61000-3-3

- surface: polished aluminium
- anodizing in 12 colours
- option of powder painting in RAL colours (other colours available on request)
- elastomer protection option in the color of the column to a height of 350 mm (other height on request)
- ROSA standard wiring chamber
- packing: sleeve material / carton / foil